

Tel: 2296 0070 • Pavas, San José, Costa Rica ATM LEDS de Costa Rica • www.iluminacionledcr.com











LED Bulb Features









Good Light Transmission

Glass cover enhances lamp transmittance up to 90%. Even light and no spot.

High CRI 75-80 Ideal for indoor lighting.

Safe All plastic as outer material ensure the whole safety and prevent the electric shock

Economy and Durability The average life for LED is 40,000 hours, 8 times longer than conventional bulb, saving maintenance cost

Fast start, No noise Faster than conventional fluorescent lamp, flicker-free.

Environmental Friendly No IR, UV radiation, Pb and Hg

Drawing



*Notes:

- 1. All dimension units are millimeters.
- 2. All dimension tolerance is ±1mm unless otherwise noted.

Application

- Widespread use in Family, School
- Office, Showing Room, Meeting Room
- Commercial Building, Tower, Hotel, Restaurant






Parameter


Products	Size	Color Temp	Luminous Flux	Input Voltage	Beam Angle	Power	CRI	Lighting efficiency	Specification & material
OED-B64-08W-CW	64x119*	2700-6500k	650-700lm	AC 85-265V	360°	8W	75-80	85lm/w	SMD LED & AL + PC

Luminance



Α	750 lux				
В	240 lux				
С	82 lux				

Installation

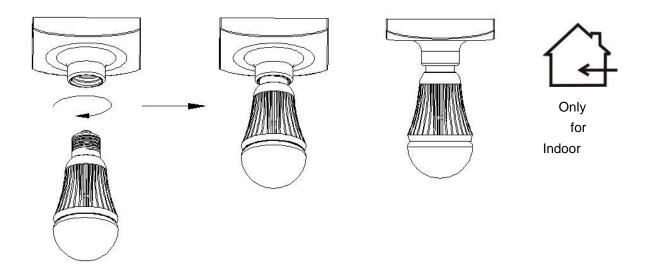

Safe Information

Please read the User's Manual Carefully before using. Please reserve the User's Manual for future reference.



Notice:

Please install the product according to the location of cable and room; Any caustic or deliquescent chemicals will destroy the hull of the lamp;

