

Outdoor / LED Street light



NBDD-LED-260



Application: Street

Main Features:


- IP66 protection degree.
- Luminous Efficacy is more than 100 lm/W.
- High pressure diecasting aluminum housing.
- Closure screen in tempered clear glass.
- Adjustable fixing system: top or side mounting.
- Integrated surge protection device.
- CE certification.




Technical Data:

- Insulation class: I
- Power supply: 120-277V (50/60Hz)
- LED current: 350/530/700mA
- Power Factor: > 0.95
- Working Ambient: -40°C to +55°C
- Life Span: >50,000 hrs.
- CRI: Ra ≥ 70
- CCT: Warm White (3000 – 3700K), Neutral White (3700 – 5000K) and Cool White (5000 – 6500K)
- Net Weight (Max. Watt): 11kg

Polar Diagram

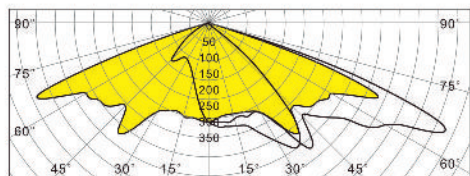

Product Dimensions(mm)

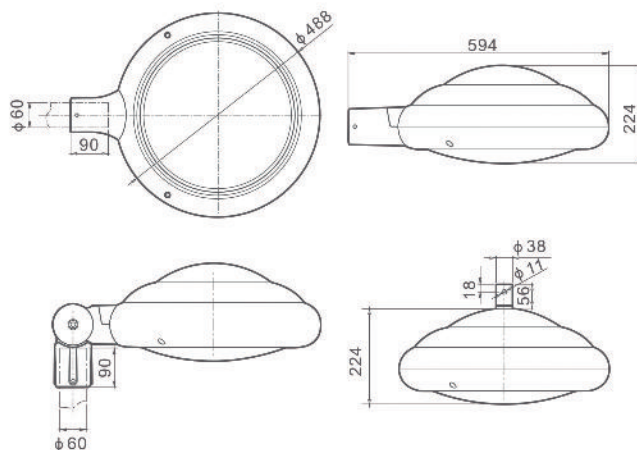

Number of LEDs	LED Current	Power Consumpt	Nominal Initial Flux*
18	350mA	20W	2200lm
	530mA	30W	3150lm
	700mA	40W	4000lm
24	350mA	25W	2700lm
	530mA	40W	4200lm
	700mA	52W	5200lm
30	350mA	35W	3850lm
	530mA	50W	5250lm
	700mA	--	--

*CCT is Cool White @ 25°C