

Tel: 2296 0070 • Pavas, San José, Costa Rica ATM LEDS de Costa Rica • www.iluminacionledcr.com











LED Bulb Features

Good Light Transmission

PC milky cover enhances lamp transmittance up to 90%. Even light and no spot.

High CRI >80ra Ideal for indoor lighting.


Safe All plastic as outer material ensure the whole safety and prevent the electric shock

Economy and Durability The average life for LED is 50,000 hours, 10 times longer than conventional bulb, saving maintenance cost

Fast start, No noise Faster than conventional fluorescent lamp, flicker-free.

Environmental Friendly No IR, UV radiation, Pb and Hg

Drawing

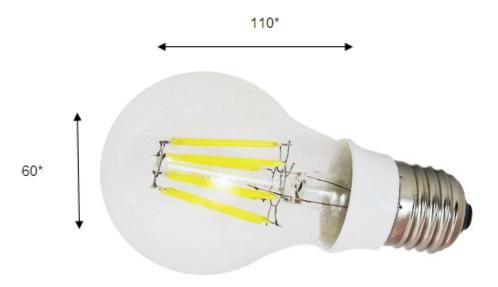

- * Notes:
- 1. All dimension units are millimeters.
- 2. All dimension tolerance is ±1mm unless otherwise noted.

A pplication

- Widespread use in Family, School
- Office, Showing Room, Meeting Room
- Commercial Building, Tower, Hotel, Restaurant






Parameter


Products	Size (MM)	Color	Color Temp	Luminous Flux (Φ)	Input Voltage	Beam Angle	Power	CRI	Lighting efficiency	Specification & material
OED-A60-8W2-WW	60*110	Cool White	6500 K	800 lm	- AC 85-265V	360°	8W	≥80	100 lm/w	Sapphire COB
OED-A60-8W2-WW		Warm White	2200 K	800 lm						& Glass+PC

Luminance



	Cool white	Warm white		
Α	450 lux	260 lux		
В	230 lux	145 lux		
С	105 lux	76 lux		

Installation

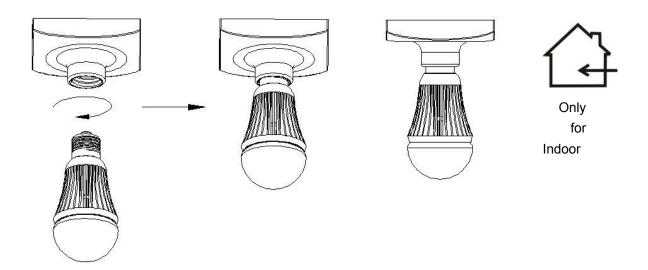

Safe Information



Please read the User's Manual Carefully before using. Please reserve the User's Manual for future reference.

Notice:

Please install the product according to the location of cable and room;

Any caustic or deliquescent chemicals will destroy the hull of the lamp;

