

Tel: 2296 0070 • Pavas, San José, Costa Rica ATM LEDS de Costa Rica • www.iluminacionledcr.com







LED Bulb Features

Good Light Transmission

Glass cover enhances lamp transmittance up to 90%. Even light and no spot.

High CRI ≥80 Ideal for indoor lighting.


Safe All plastic as outer material ensure the whole safety and prevent the electric shock

Economy and Durability The average life for LED is 30,000 hours, 6 times longer than conventional bulb, saving maintenance cost

Fast start, No noise Faster than conventional fluorescent lamp, flicker-free.

Environmental Friendly No IR, UV radiation, Pb and Hg

Drawing



- * Notes:
- 1. All dimension units are millimeters.
- 2. All dimension tolerance is ±1mm unless otherwise noted.

Application

- Wide spread use in Family, School
- Office, Showing Room, Meeting Room
- Commercial Building, Tower, Hotel, Restaurant






Parameter


Products	Size	Color Temp	Luminous Flux	Beam Angle	Power	Specification & material
OED-GB70-09W-CW	60X130*	6500 K	800- 850 lm	180°	8W	SMD LED & White Aluminum + PC

Luminance



Α	810 lux		
В	320 lux		
С	120 lux		

Installation

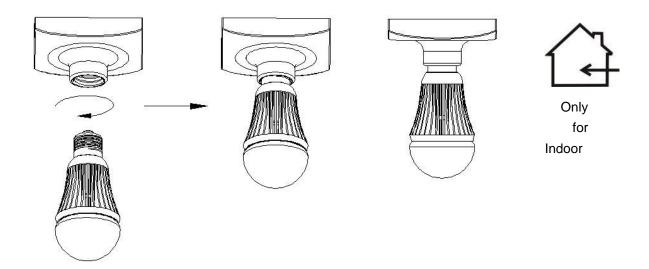

Safe Information

Please read the User's Manual Carefully before using. Please reserve the User's Manual for future reference.



Notice:

Please install the product according to the location of cable and room; Any caustic or deliquescent chemicals will destroy the hull of the lamp;

